



MICHELIN[®] XZY[®]3 WIDE BASE TIRE



Exceptional all-position wide base radial designed for heavy front axle service in mixed service applications.




MICHELIN® XZY®3 WIDE BASE TIRE



ON/OFF ROAD APPLICATIONS

Exceptional all-position wide base radial designed for heavy front axle service in mixed service applications.

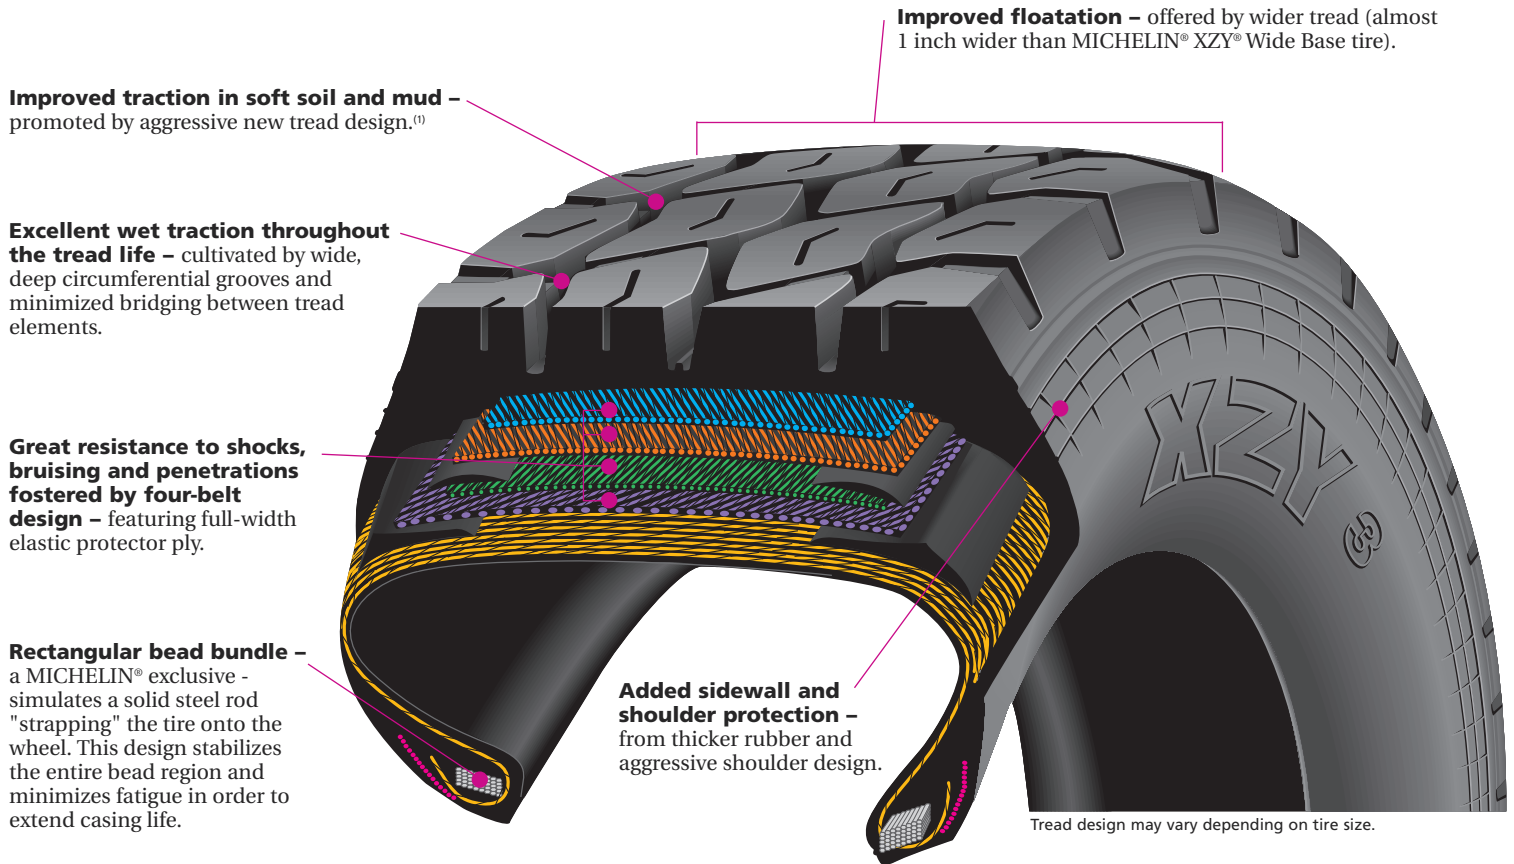

Tread design may vary depending on tire size.

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Revs Per Mile	Max. Load and Pressure Single			
			32nds	mph	in.	mm	in.	mm	in.	mm			lbs.	psi	kg.	kPa
385/65R22.5	J	53779	22	65	19.6	499	42.4	1078	14.9	379	11.75, 12.25	491	9370	120	4250	830
425/65R22.5	L	40321	23	65	20.6	524	44.7	1137	16.6	421	13.00, 12.25	465	11400	120	5150	830
445/65R22.5	L	83691	23	65	21.1	536	45.8	1164	17.8	451	14.00, 13.00	455	12800	130	5800	900

Note: Wheel listed first is the measuring wheel.

(1) When compared with MICHELIN® XZY® Wide Base tire.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States

Michelin North America, Inc.
One Parkway South
Greenville, SC 29615
1-888-622-2306

Canada

Michelin North America (Canada), Inc.
2500 Daniel Johnson, Suite 500
Laval, Quebec H7T 2P6
1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V.
Av. 5 de febrero No. 2113-A
Fracc. Industrial Benito Juarez
7 6120, Querétaro, Qro. Mexico
011 52 442 296 1600